



Relay boards and electromagnetic relays

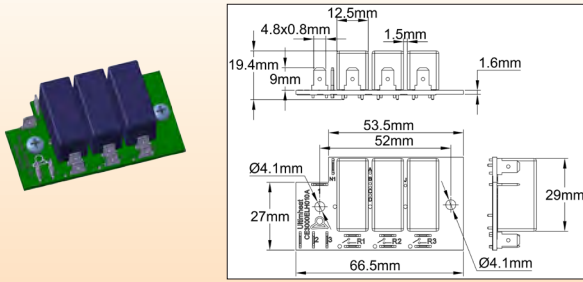

Electronic relay circuit board, 3 relays 16A 250V. Designed for boxes containing a single pole thermostat control or an electronic controller with or without manual reset option. They are available in 1 to 3 relays, NO contacts. Relay coils are individually powered, 220-240V. 4.8 x 0.8 terminals.

They can be installed directly on all plastic extended thermostat mounting boards, on electronic controllers boards, and on the flat plastic distribution boxes boards. Jumpers enable the interconnection of relay coils for simultaneous operation


References	Description
6YRELD230116	1 relay board
6YRELD230216	2 relays board
6YRELD230316	3 relays board

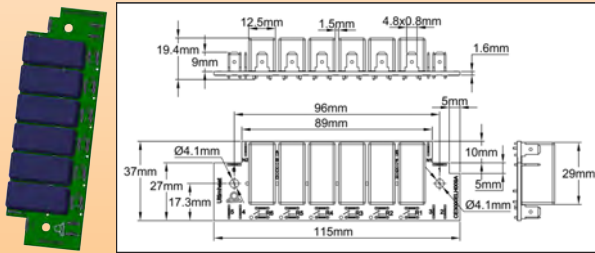

Electronic relay card 6 relays 16A 250V. They are available in 4 to 6 relays, NO contacts. Relay coils are individually powered, 220-240V. 4.8 x 0.8 terminals.


They can be installed directly on all plastic extended thermostat mounting boards, on electronic controllers boards, and on the flat plastic distribution boxes boards. Jumpers enable the interconnection of relay coils for simultaneous operation

References	Description
6YRELC230416	4 relays board
6YRELC230516	5 relays board
6YRELC230616	6 relays board

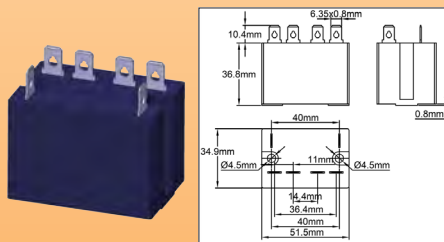


2 x 25A 250V resistive (AC1) (CE and UL) NO contact, sealed housing, 6.35 x 0.8 terminals. This relay can be mounted without mounting plate directly on all plastic triggered front provided for bulb and capillary thermostats and electronic controllers, and on the flat fronts of the distribution boxes in this catalog
Coil 200-240VAC

Reference	6YREL230225
-----------	-------------

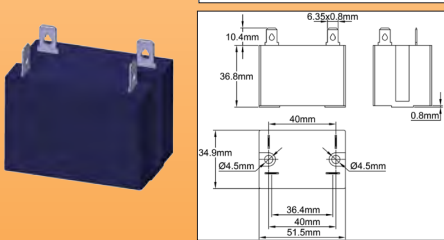


1 x 30A 250V resistive (AC1) (CE and UL) NO contact, sealed housing, 6.35 x 0.8 terminals. This relay can be mounted without mounting plate directly on all plastic triggered front provided for bulb and capillary thermostats and electronic controllers, and on the flat fronts of the distribution boxes in this catalog
Coil 200-240VAC

Reference	6YREL230130
-----------	-------------

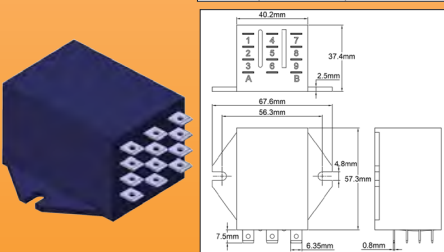

3 x 25A 250V resistive (AC1), sealed housing, 6.35 terminals, SPDT contacts, coil 240VAC alternative. This relay has a 3 x 40A rating, however it is limited to 25A within control box applications.

Reference	6YREL230340
-----------	-------------

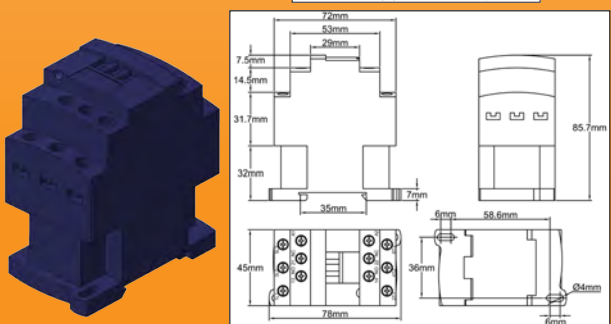

3 x 25A or 3 x 32A 250/400VAC res. (AC1), screw terminals, 240VAC or 400VAC coil.

Comply with IEC947-1 (EN60947-1) standard, but its large footprint limits its applications inside control boxes. It does not fit the Y8 types, but can be used in Y6 and Y7 with single pole thermostat.

References	Heating elements applications rating (AC1)	Coil voltage
6YREL230440325T	3 x 25A	230V
6YREL400440325T	3 x 25A	400V
6YREL230440332T	3 x 32A	230V
6YREL400440332T	3 x 32A	400V