


Type 8X DPNC manual reset high limit, fail safe

DIMENSIONS

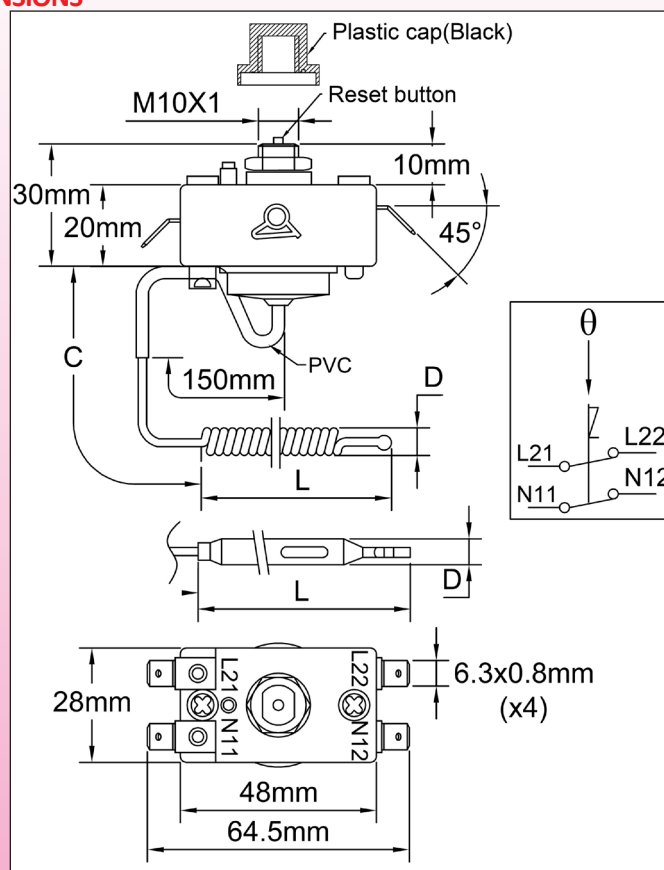

TECHNICAL FEATURES

Housing dimensions: 43 x 35 x 29 mm (without terminals and diaphragm)

Capillary: copper, capillary length 250mm or 900 mm, 150 mm long PVC sleeve on capillary. Capillary minimum bending radius 5 mm.

For technical reasons, we do not recommend to use capillary length longer than 900 mm.

Bulb: copper, corkscrew type for temperatures from 60 to 130°C(140 to 266°F), tubular dia 6 mm from 130°C to 170°C(266 to 338°F).

Temperature sensing element: Liquid-filled thermostatic assembly whose boiling causes tripping of the contact. Therefore, unlike liquid filled systems, these thermostats are sensitive to atmospheric pressure, and their reaction time is slower.

Terminals: 6.35 x 0.8 quick connect terminals Adjustment: fixed setting

Mounting: Front bushing, with M10x1

Manual reset: fail safe action, front access button

Rating: 20A 250VAC

Contacts: DPST (snap action contact)

Max ambient temperature on head: 125°C

Main references

Reference	Calibration Temperature (°C/°F)	Minimum resettable temperature (°C/°F)	Capillary length (mm)	Bulb diameter (mm)	Bulb length (mm)	Max temperature on bulb (°C/°F)
8X0060090CI61001	60±5°C/140±41°F	20°C/68°F	900	6	50	90°C/194°F
8X0060090CA61001	60±5°C/140±41°F	20°C/68°F	250	6	50	90°C/194°F
8X0070100CI61001	70±5°C/158±41°F	30°C/86°F	900	6	50	100°C/212°F
8X0080110CI61001	80±5°C/176±41°F	40°C/104°F	900	6	50	110°C/230°F
8X0090120CI61001	90±5°C/194±41°F	50°C/122°F	900	6	50	120°C/248°F
8X0110140CI61001	110±5°C/230±41°F	70°C/158°F	900	6	50	140°C/284°F
8X0130160CI61001	130±6°C/266±42.8°F	90°C/194°F	900	6	60*	160°C/320°F
8X0150180CI61001	150±7°C/302±44.6°F	110°C/230°F	900	6	60*	180°C/356°F
8X0170200CI61001	170±7°C/338±44.6°F	130°C/266°F	900	6	60*	200°C/392°F

* Cylinder bulb

