


# IP54, Y5 Hand held or wall mounting electronic thermostat

## Accessories and options




Stopper pocket for liquid temperature measurement inside bottles, carboys and other containers. Dia. 8 mm, length adjustable from 100 to 500 mm.

Reference	66DI08500FL
-----------	-------------

## Knob printings


### °C Printing

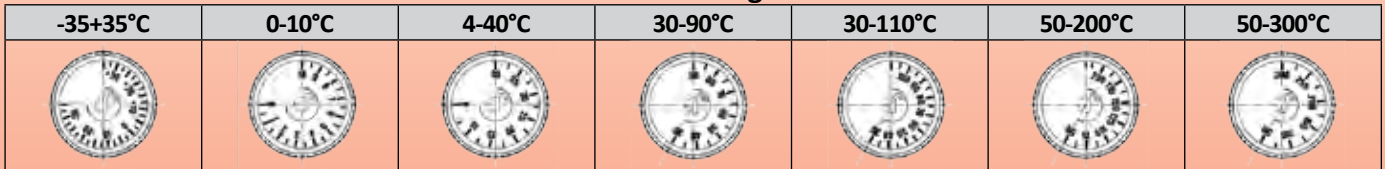

### °F Printing



## NTC Thermistor

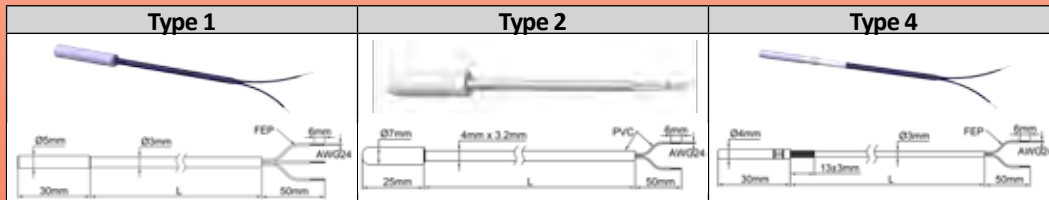

References	Temperature ranges	R	B	Protection pocket	Cable, (L)	applications	Model
TNR60030C20001F6	-20+120°C	R25°C: 10KΩ +/- 1%	B25/50°C: 3380 +/- 1%	Nickel plated copper	200°C FEP insulated, L=2m	Usual, from ambient to 120°C	1
TNR70025P20001F6	-30+50°C	R25°C: 10KΩ +/- 1%	B25/50°C: 3380 +/- 1%	PVC, waterproof	80°C PVC insulated L=2m	Cold rooms and ambient	2
TPR40030C20001F6	50-300°C	R25°C: 500K +/-2.5%	B25/50°C: 4260+/-2	Stainless steel	200°C FEP insulated, L=2m	200 and 300°C temperature ranges	4

## Options



Standard version: grommet cable output for cables from 4 to 8.6 mm OD



SJT 3 x AWG16 cord, length 1m, with 15A UL receptacle



SJT 3 x AWG16 cord, length 1m, with 15A UL plug



SJT 3 x AWG16 cord, length 1m, without plug



H05VV-F 3G1.5 cord, length 1m, with Euro plug



H05VV-F 3G1.5, length 1m, cord without plug

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

