


Pockets, flanges, brackets and other accessories

Liquid temperature sensing with rod thermostats

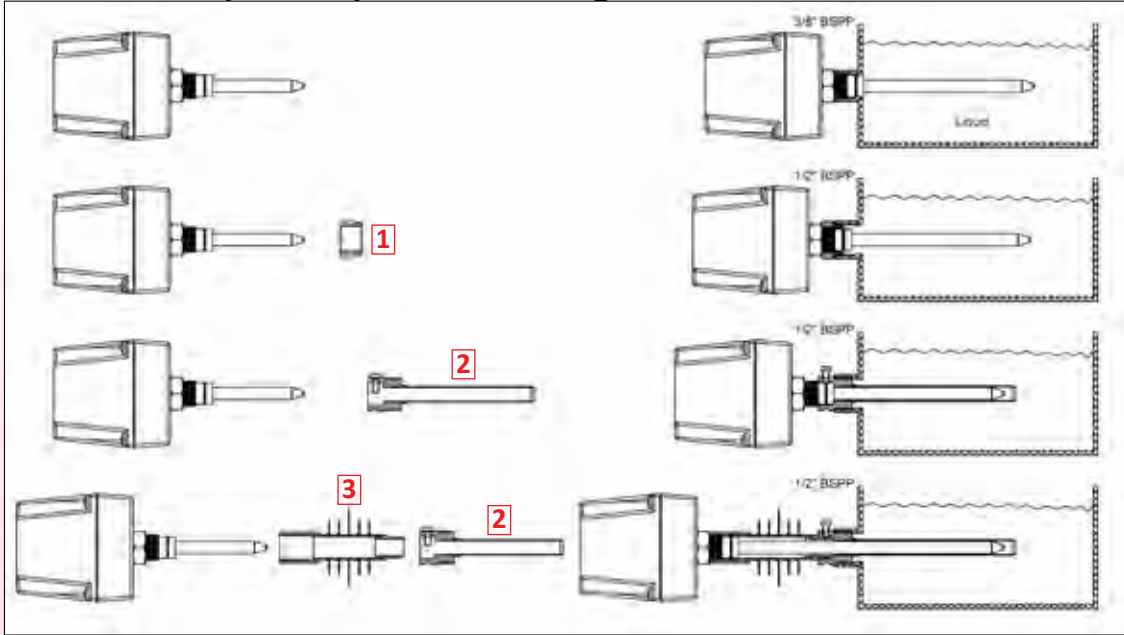

1

3/8 x 1/2", 304 stainless steel fitting (fits the 3/8" thread located under the housing)

Reference	66RI1238
-----------	----------

2

G1/2 (BSPT) Nickel plated brass pocket dia. 8.5x10mm, for rods dia. 8mm

L	References
90mm	66DK12S090710
100mm	66DK12S100710
190mm	66DK12S190710
230mm	66DK12S230710
290mm	66DK12S290710
440mm	66DK12S440710

2

G1/2 (BSPT) Nickel plated brass pocket dia. 10.5x12mm, for rods dia. 10mm

L	References
90mm	66DK12S900712
110mm	66DK12S100712
200mm	66DK12S190712
230mm	66DK12S230712
300mm	66DK12S290712
450mm	66DK12S440712

2

1/2 NPT plastic pocket dia. 8.5x14 mm for rods and bulbs dia 8 mm (Swimming pool and corrosive water applications)

Reference	66DR12510021C000
-----------	------------------

2

G1/2 (BSPT) Aisi 304 Stainless steel pocket dia. 9x10 mm, for rods dia 8mm

L (mm)	References
90mm	66DI12S090S10
100mm	66DI12S100S10
190mm	66DI12S190S10
230mm	66DI12S230S10
290mm	66DI12S290S10
440mm	66DI12S440710

2

G1/2 (BSPT) Aisi 304 Stainless steel pocket dia. 11x12 mm, for rods dia. 10mm

L	References
90mm	66DI12S090S12
100mm	66DI12S100S12
190mm	66DI12S190S12
230mm	66DI12S230S12
290mm	66DI12S290S12
440mm	66DI12S440712

2

G1/4 (BSPT) Nickel plated brass pocket dia. 8.5x10 mm, for rods dia. 8mm

L	References
100mm	66DL14P10010075N
190mm	66DL14P19010075N
290mm	66DL14P29010075N
440mm	66DL14P44010075N

3

Rod cooler with 14.5mm termination.. Used on high temperature rod thermostats. Fits the 3/8 thread located under the housing and the dia. 14.5 hole of pockets or flanges Not usable on Y0 types

Reference	66RF07015
-----------	-----------

En raison de l'évolution technique constante de nos produits, les plans, dessins, photos et caractéristiques repris dans les pages techniques sont communiqués sans engagement et peuvent être modifiés sans préavis

