




















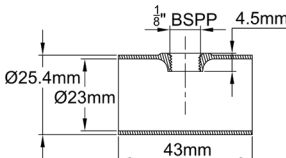

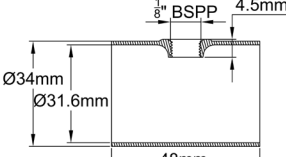

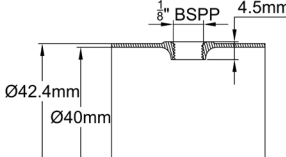






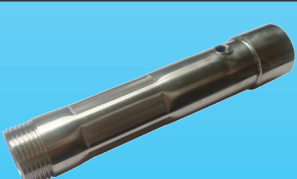
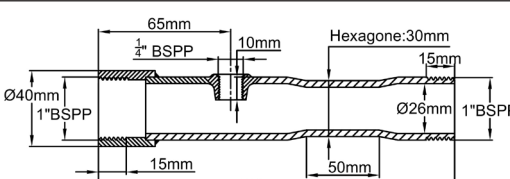
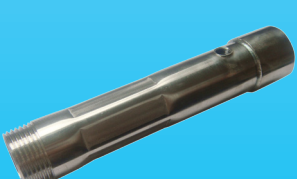
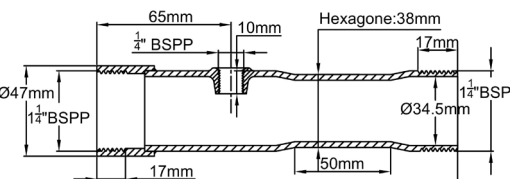

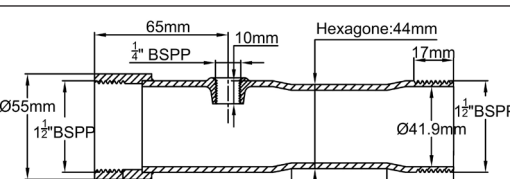
Nuts, gaskets, PVC tubes

En raison de l'évolution technique constante de nos produits, les plans, dessins, photos et caractéristiques repris dans les pages techniques sont communiqués sans engagement et peuvent être modifiés sans préavis

		<p>9/16-18 mounting nut, ABS, red</p> <p>Reference Z6VE1000350007A</p>
		<p>1/4" NPSM mounting nut, ABS, black</p> <p>Reference Z6VE1000350003A</p>
		<p>Self-locking 1/4" NPSM mounting nut, stainless steel</p> <p>Reference Z6VE1000350001A</p>
		<p>9/16-18 tube securing nut, ABS, red</p> <p>Reference Z6VE1000350009A</p>
		<p>1/4" NPSM tube securing nut, ABS, black</p> <p>Reference Z6VE1000350006A</p>
		<p>Waterproof adhesive foam gasket for 1/4" NPSM and 9/16-18 threads</p> <p>Reference Z6JO1000350001A</p>
		<p>1/8 ID x 1/4 OD soft PVC tube, black</p> <p>Reference Z6TU70000000000</p>
		<p>Black ABS housing 48x48x59 mm, IP54, with PG11 cable gland. Bottom side with 14.1 mm dia. hole for pressure switch, Fits types: ZE, ZA, ZF, ZG, ZB</p> <p>Reference 66FS04848590P002</p>
		<p>Black ABS housing, 76x55x50mm, IP20, with PG11 cable gland. Bottom side with 14.1 mm dia. hole for pressure switch, Fits types: ZP, ZQ, ZW, ZY, ZA, ZF, ZG, ZB</p> <p>Reference 66FS07655500P002</p>



Aisi 304 Stainless steel fittings and Tees* BSPP threads

		<p>Butt welding tee, 25.4x23 mm tube, length 43 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA1252343G81A</p>
		<p>Butt welding tee, 34 x 31.6 mm tube, length 48 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA1343248G81A</p>
		<p>Butt welding tee, 42.4 x 40 mm tube, length 50 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA1424050G81A</p>
		<p>1"BSPP x 1"BSPP female coupling, length 43 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA140G143G51A</p>
		<p>1"1/4 BSPP x 1"1/4 BSPP female coupling, length 48 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA147G448G51A</p>
		<p>1"1/2 BSPP x 1"1/2 BSPP female coupling, length 50 mm, with 1/8"BSPP female thread</p> <p>Reference 66RRA155G250G51A</p>
		<p>180 mm long 1"BSPP male x 1"BSPP female coupling, (To deport the pressure switch from heating zones), with 1/8"BSPP female thread</p> <p>Reference 66RRA140U1A8G51A</p>
		<p>180 mm long 1"1/4BSPP male x 1"1/4BSPP female coupling, (to deport the pressure switch from heating zones), with 1/8"BSPP female thread</p> <p>Reference 66RRA147U4A8G51A</p>
		<p>180 mm long 1"1/2BSPP male x 1"1/2BSPP female coupling, (to deport the pressure switch from heating zones), with 1/8"BSPP female thread</p> <p>Reference 66RRA155U2A8G51A</p>

* These references are available on request in 316 or 316L stainless steel and with NPT threads (MOQ apply)

